



50mm MIN
 CLEAR OPENING WIDTH
 DETAIL SHOWING MINIMUM JAMB & HEAD SURFACE DIMENSIONS

INTERNAL ELEVATION
 SHOWING STANDARD HARDWARE OPTIONS

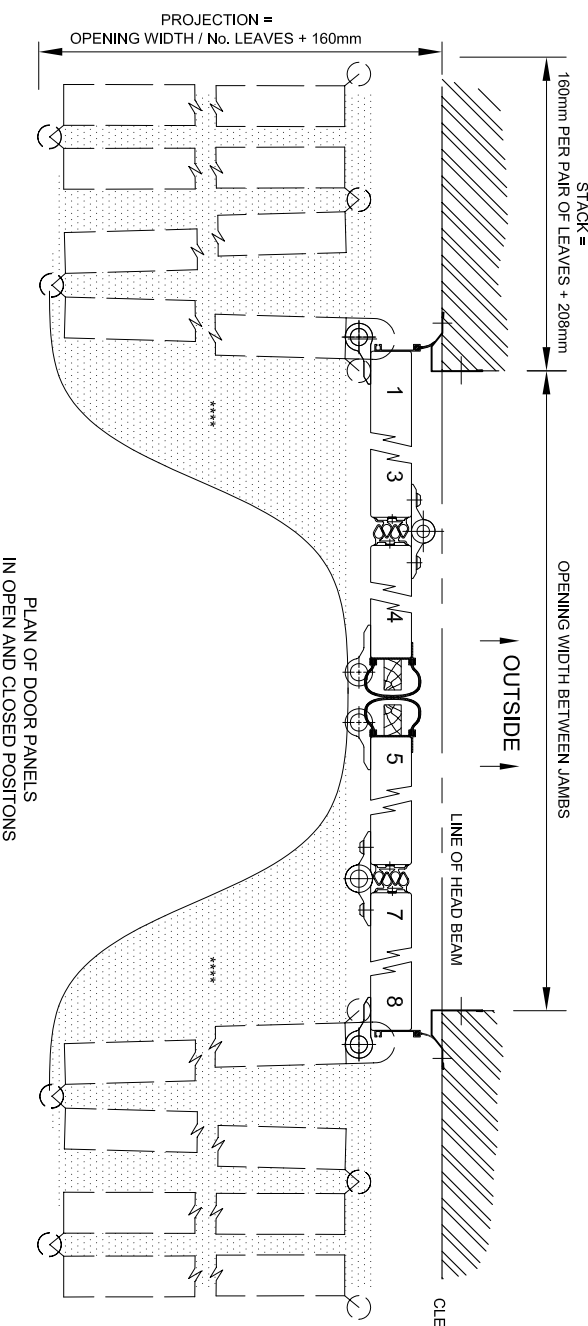

PLAN OF DOOR PANELS
 IN OPEN AND CLOSED POSITIONS

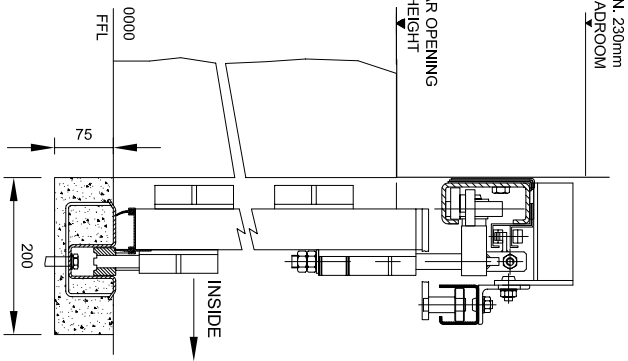

LEAF CONFIG.	MAX HEIGHT	MAX DOOR SIZES (MAX 60m ²)
3+3 LEAVES	UP TO 5200mm HIGH	UP TO 6000mm HIGH
4+4 LEAVES	6750mm WIDE	6100mm WIDE
5+5 LEAVES	9050mm WIDE	8150mm WIDE
6+6 LEAVES	11300mm WIDE	10200mm WIDE
	13600mm WIDE	12250mm WIDE

NOTES
 INSIDE FACE OF HEAD AND JAMBS TO IN THE SAME PLANE AND FREE FROM BOLT HEADS / FITTINGS ETC.
 HEAD BEAM MUST BE SUITABLE TO ACCEPT M10 FIXING BOLTS AND DESIGNED TO TAKE DOOR WEIGHT OF APPROX 20kg/m². MAXIMUM ALLOWABLE DEFLECTION UNDER WEIGHT OF DOOR - 8mm.
 FLOOR MUST BE LOWER THAN THRESHOLD IN SHADED LEAF SWEEPING AREAS MARKED *****

- OPTIONS (please tick if reqd)
 WINDOWS (MAX 2 PER LEAF)
 680x370 EASIFIT D/G ACRYLIC VISION PANEL
 680x500 D/G SECURITY VISION PANEL
 WICKET DOOR
 WICKET DOOR STD LEVER HARDWARE*
 WICKET DOOR PANIC HARDWARE* (TO BE FITTED IN END LEAF ONLY)
 ADDITIONAL LOCKING
 LEVER OPERATED FLOOR BOLT* BETWEEN LEAVES 1&2
 CONTROL EQUIPMENT
 DIRECT ON LINE CONTROL PANEL
 EXTRA PUSH BUTTON KEYSWITCH
 AUTO TIMED RETURN RADIO CONTROL
 INDUCTION LOOP - OUTSIDE
 INDUCTION LOOP - INSIDE

- SAFETY EQUIPMENT
 SAFETY EDGE PHOTOCELL
 * NOTE - WICKET DOORS AND FLOOR BOLTS WILL BE FITTED WITH AN ELECTRICAL INTERLOCK
 QUANTITY
 SETS AS DRAWN
 SETS OPPOSITE HAND

FINISH
 EXTERNAL:
 INTERNAL:
 CONTRACTOR/CIENT
 SITE

DATE
 DRAWING No. OSP-F2P1-5106
 DRAWN BY

