



PLAN OF DOOR PANELS
IN OPEN AND CLOSED POSITIONS

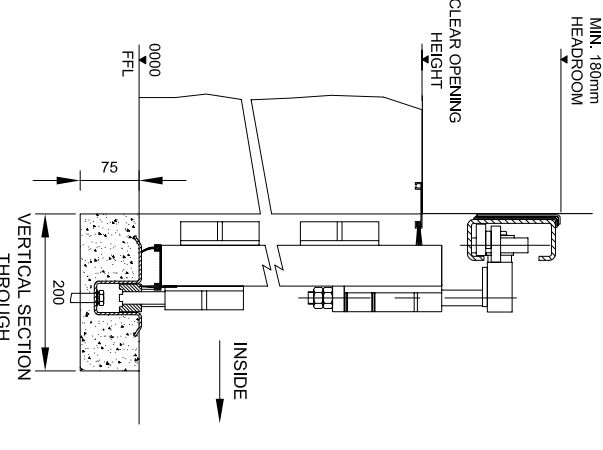

| LEAF COUNT | MAX HEIGHT | MAX STACK SIZES AT EACH JAMB (USE ANY COMBINATION OF LEAVES, ie. 6+4, 8+2, etc) |
|------------|-------------|---|
| 2 LEAVES | 2250mm WIDE | UP TO 6000mm HIGH |
| 4 LEAVES | 4500mm WIDE | 2050mm WIDE |
| 6 LEAVES | 6800mm WIDE | 4050mm WIDE |
| 8 LEAVES | 9050mm WIDE | 6100mm WIDE |
| | | 8200mm WIDE |

Jewellers
Specialist Doors



NOTES
INSIDE FACE OF HEAD AND JAMB TO IN THE SAME PLANE AND FREE FROM BOLT HEADS / FITTINGS ETC.
HEAD BEAM MUST BE SUITABLE TO ACCEPT M10 FIXING BOLTS AND DESIGNED TO TAKE DOOR WEIGHT OF APPROX 20kg/m². MAXIMUM ALLOWABLE DEFLECTION UNDER WEIGHT OF DOOR - 8mm.
FLOOR MUST BE LOWER THAN THRESHOLD IN SHADED LEAF SWEEPING AREAS MARKED *****.

- OPTIONS (please tick if reqd)**
- WINDOWS (MAX 2 PER LEAF)
 - 680x370 EASYFIT D/G ACRYLIC VISION PANEL
 - 680x500 D/G SECURITY VISION PANEL
- WICKET DOOR**
- WICKET DOOR STD LEVER HARDWARE
 - WICKET DOOR PANIC HARDWARE (TO BE FITTED IN END LEAF ONLY)
- LOCKING - FOR EACH PAIR OF LEAVES**
- ESPAGNOLETTE BOLT

QUANTITY SETS AS DRAWN
SETS OPPOSITE HAND

FINISH
EXTERNAL: _____
INTERNAL: _____

CONTRACTOR/CIENT _____

SITE _____

DATE _____ **DRAWN BY** _____

OPENING / DOOR REF. _____

DRAWING No. OSP-H2M-5104

OSPREY DOOR - HINGED TO THE JAMB - BIPARTING

