




DETAIL SHOWING MINIMUM JAMB & HEAD SURFACE DIMENSIONS

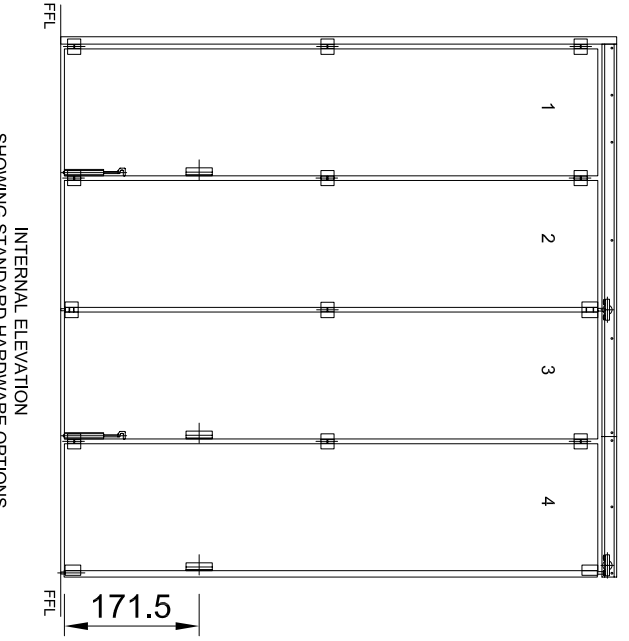

INTERNAL ELEVATION SHOWING STANDARD HARDWARE OPTIONS

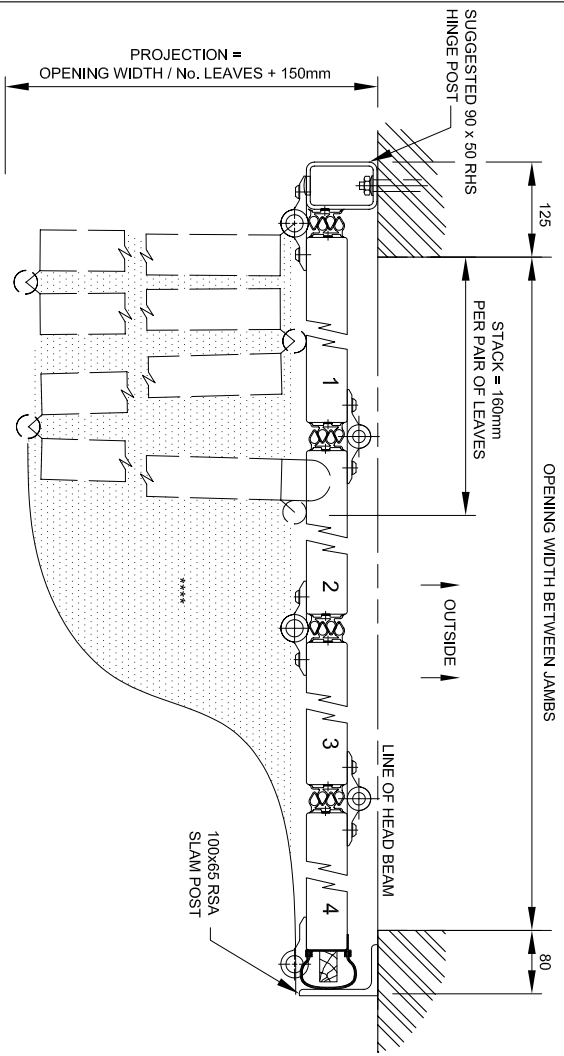

PLAN OF DOOR PANELS IN OPEN AND CLOSED POSITIONS

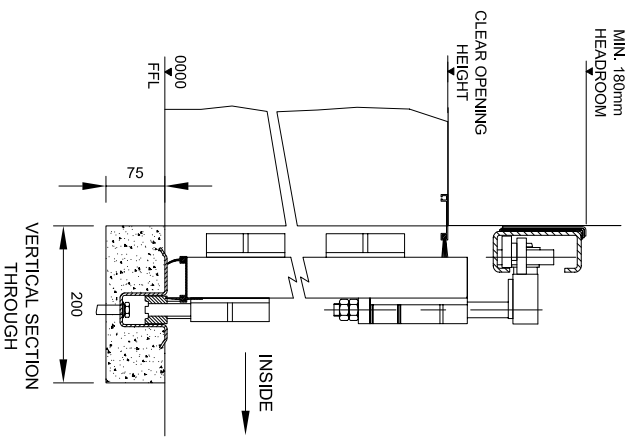

VERTICAL SECTION THROUGH

LEAF COUNT	MAX. HEIGHT	MAX. OPENING SIZES SIZES
2 LEAVES	UP TO 5200mm HIGH	UP TO 6000mm HIGH
4 LEAVES	2250mm WIDE	2050mm WIDE
6 LEAVES	4550mm WIDE	4100mm WIDE
8 LEAVES	6800mm WIDE	6150mm WIDE
	9100mm WIDE	8200mm WIDE

NOTES  
INSIDE FACE OF HEAD AND JAMB TO IN THE SAME PLANE AND FREE FROM BOLT HEADS / FITTINGS ETC.  
HEAD BEAM MUST BE SUITABLE TO ACCEPT M10 FIXING BOLTS AND DESIGNED TO TAKE DOOR WEIGHT OF APPROX 20kg/m<sup>2</sup>. MAXIMUM ALLOWABLE DEFLECTION UNDER WEIGHT OF DOOR - 8mm.  
FLOOR MUST BE LOWER THAN THRESHOLD IN SHADED LEAF SWEEPING AREAS MARKED \*\*\*\*\*.

- OPTIONS (please tick if reqd)  
 WINDOWS (MAX 2 PER LEAF)  
 680x370 EASIFIT D/G ACRYLIC VISION PANEL  
 680x500 D/G SECURITY VISION PANEL  
**WICKET DOOR**  
 WICKET DOOR STD LEVER HARDWARE  
 WICKET DOOR PANIC HARDWARE (TO BE FITTED IN END LEAF ONLY)  
**LOCKING - FOR EACH PAIR OF LEAVES**  
 ESPAGNOLETTE BOLT

QUANTITY	SETS AS DRAWN SETS OPPOSITE HAND
FINISH	
EXTERNAL:	
INTERNAL:	
CONTRACTOR/CIENT	
SITE	
DATE	DRAWN BY
DRAWING No.	OSP-H1M-5103